


Neopor[®] Plus GPS Insulation for Commercial Construction

Overview:

For over 20 years Neopor Graphite Polystyrene has been providing architects, engineers and designers with thinner insulation profiles that meet and exceed the performance of other foam insulation products. The Neopor Plus GPS delivers the highest R-value in the Neopor GPS product family. Neopor Plus GPS is manufactured under UL and International Code Council third party independent audit and certification. With its high stable R-value and low water absorption characteristics, Neopor Plus GPS is an ideal insulation material for commercial construction projects.

Why consider Neopor[®] in your next project?

- **Environment:** Neopor is GreenGuard Gold certified and available with a product-specific EPD and Manufacturer's Inventory Report.
- **Flexibility:** Neopor insulation can be used for Cavity Wall, Perimeter, Roof, EIFS, Stucco and more.
- **Savings:** Per nominal inch, Neopor can deliver the same R-value as XPS using up to 30% less raw material.
- **Digital:** Assets to help you with your project including BIM objects, videos and more.
- **Availability:** Neopor Plus GPS is manufactured nationwide through our authorized network ensuring local supply.
- **Stable R-value:** Neopor doesn't rely on captive gases to boost its R-value. In Canada, that means no LTTR concerns.
- **Performance:** Neopor Plus GPS has low water absorption while remaining vapor-open delivering best in class insulating performance.

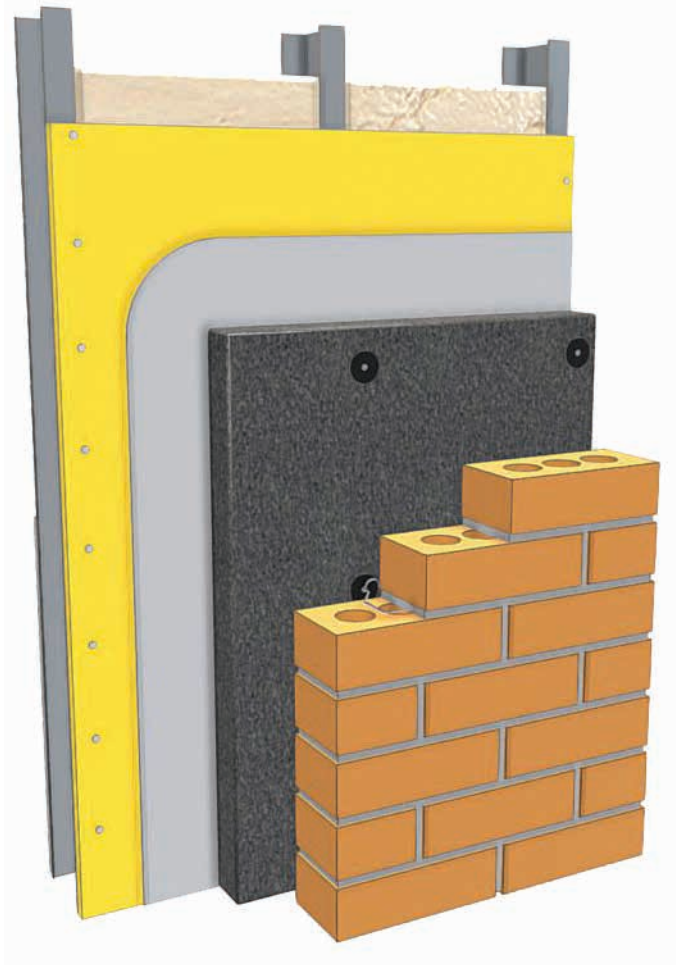

NEOPOR® PLUS GPS TECHNICAL PROPERTIES

Neopor Plus GPS rigid foam is today's energy-efficient and cost-effective insulation solution for architects, builders and contractors.

Property	Unit	Neopor Plus GPS		
Polystyrene type		GPS+	GPS+	GPS+
CAN ULC S701 Classification ¹		Type 1	Type 2	Type 3
Compressive Resistance (ASTM D1621)	at yield of 10% deformation in kPa / psi (min)	70 / 10	110 / 16	140 / 20
Thermal Resistance (R-value) ²	(°C·m ² /W) at 23°C for 25 mm / (F ² ·ft ² ·h/Btu) at 75°F for 1 inch	0.83 / 4.7	0.83 / 4.7	0.83 / 4.7
Water Vapor Permeance ³ (ASTM E96)	Max (ng/Pa·s·m ²) / Perms	300 / 5.0	200 / 3.3	130 / 2.2
Water Absorption ³ (ASTM D2842)	Max volume % absorbed	6.0 ³	4.0 ³	2.0 ³
Flexural Strength (ASTM C203)	kPa / psi (min)	170 / 24	240 / 35	300 / 44
Flame Spread Index (CAN/ULC S102.2)	Max	230	230	230
Limiting Oxygen Index (ASTM D2863)	Min	24	24	24

¹ QAI Listing, B1055-2

² R means resistance to heat flow. The higher the R-value, the greater the insulating power. Ask your seller for the fact sheet on R-values.

³ Max values per ULC S701 standard. Product properties may be lower.

Please note:

The technical and physical metrics provided in this table are reference values for insulation products made of Neopor GPS. The values and properties may vary depending on how they are processed and produced.

Important Note:

THE DESCRIPTIONS, DESIGNS, DATA AND INFORMATION CONTAINED HEREIN ARE PRESENTED IN GOOD FAITH, AND ARE BASED ON BASF'S CURRENT KNOWLEDGE AND EXPERIENCE. THEY ARE PROVIDED FOR GUIDANCE ONLY, AND DO NOT CONSTITUTE THE AGREED CONTRACTUAL QUALITY OF THE PRODUCT OR A PART OF BASF'S TERMS AND CONDITIONS OF SALE. BECAUSE MANY FACTORS MAY AFFECT PROCESSING OR APPLICATION/USE OF THE PRODUCT, BASF RECOMMENDS THAT THE READER CARRY OUT ITS OWN INVESTIGATIONS AND TESTS TO DETERMINE THE SUITABILITY OF A PRODUCT FOR ITS PARTICULAR PURPOSE PRIOR TO USE. IT IS THE RESPONSIBILITY OF THE RECIPIENT OF PRODUCT TO ENSURE THAT ANY PROPRIETARY RIGHTS AND EXISTING LAWS AND LEGISLATION ARE OBSERVED. NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH HEREIN, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. ANY DESCRIPTIONS, DESIGNS, DATA AND INFORMATION GIVEN IN THIS PUBLICATION MAY CHANGE WITHOUT PRIOR INFORMATION. THE DESCRIPTIONS, DESIGNS, DATA, AND INFORMATION FURNISHED BY BASF HEREUNDER ARE GIVEN GRATIS AND BASF ASSUMES NO OBLIGATION OR LIABILITY FOR THE DESCRIPTIONS, DESIGNS, DATA OR INFORMATION GIVEN OR RESULTS OBTAINED, ALL SUCH BEING GIVEN AND ACCEPTED AT THE READER'S RISK.